

◆ SDSL MICRO FILTER / KE-RT16




- LINE Terminal : RJ11 PHONE Terminal : PIG TAIL
- Use with SDSL POTS SPLITTER
- Easy Installation

▶ Electrical Characteristics

No	Test Item	Measure Frequency	Specification	Remark
1	Insertion Loss	1004Hz	0.3dB MAX.	
2	Attenuation Distortion	0.2 ~ 3.4kHz	±0.5dB MAX.	
3	Delay Distortion	0.2 ~ 3.4kHz	200 μ s MAX.	
4	Return Loss	0.2 ~ 3.4kHz	20dB MIN.	
5	Attenuation	10 ~ 1160kHz	30dB MIN.	
6	DC Resistance between Tip-Ring		25 Ω MAX.	Short
			5M Ω MIN.	Open

▶ Apparatus Diagram(Unit:mm)

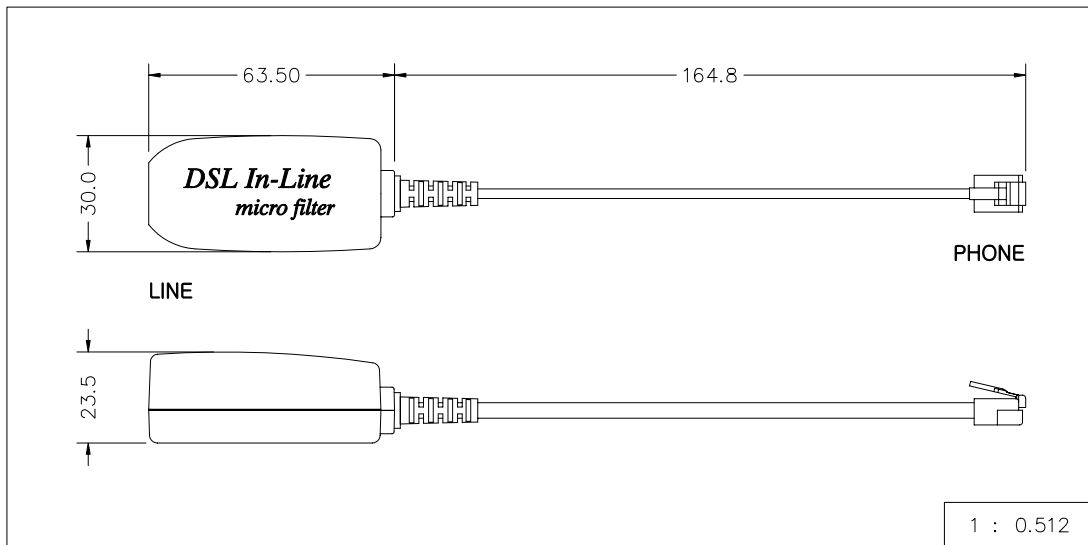

▶ Block Diagram

