

◆ VDSL MICRO FILTER / KE-RT30B




- LINE Terminal : RJ11 PHONE Terminal : PIG TAIL
- Easy Installation
- Standard ISDN Type

▶ Electrical Characteristics

No	Test Item	Measure Frequency	Specification	Remark
1	Insertion Loss	1004Hz	1.0dB MAX.	
2	Attenuation Distortion	0.2 ~ 80kHz	±1.0dB MAX.	
		80 ~ 125kHz	±1.5dB MAX.	
3	Delay Distortion	0.2 ~ 125kHz	50 μ s MAX.	
4	Return Loss	0.2 ~ 125kHz	15dB MIN.	
5	Longitudinal Balance	0.2 ~ 125kHz	40dB MIN.	
6	Attenuation	0.8 ~ 12MHz	45dB MIN.	
7	DC Resistance between Tip-Ring		25 Ω MAX.	Short
			5M Ω MIN.	Open

▶ Apparatus Diagram(Unit:mm)

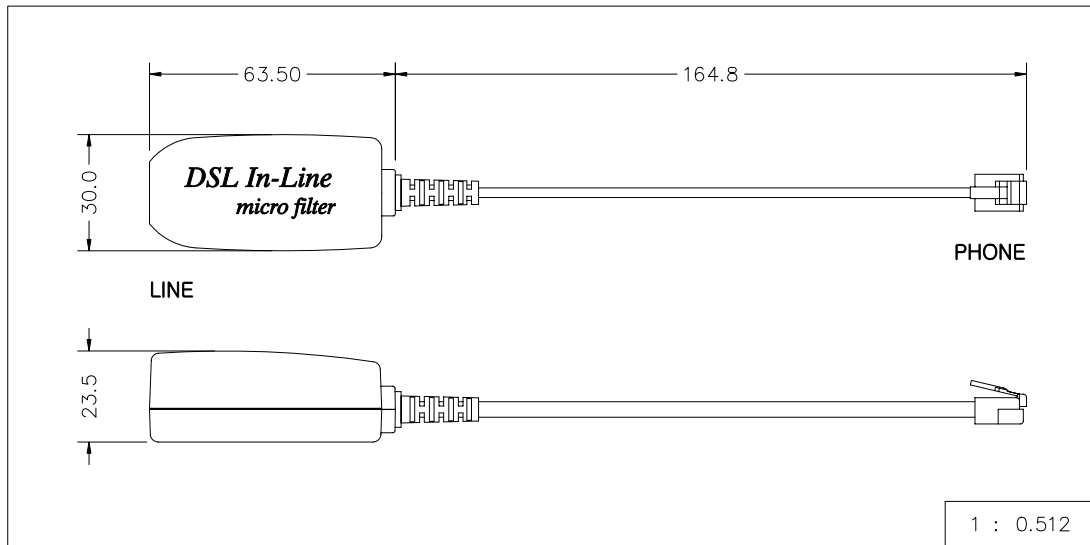

▶ Block Diagram

